

TECHNICAL**BULLETIN****TECHNICAL BULLETIN: 11-01****DATE:** March 11, 2011**SUBJECT:** Introduction of new Electronic Lock on Business Hours Cabinets**AVAILABILITY:** All Authorized Triton Distributors and Third Party Service Providers

This bulletin addresses:		Recommended Implementation is:	
<input type="checkbox"/>	Documentation Changes	<input checked="" type="checkbox"/>	Now for all affected units
<input type="checkbox"/>	Hardware Service Issues	<input type="checkbox"/>	All affected units during next service visit
<input type="checkbox"/>	Software Announcements	<input type="checkbox"/>	Optional
<input checked="" type="checkbox"/>	Technical Tips	<input type="checkbox"/>	No implementation required

DESCRIPTION:

Triton announces the introduction of a new electronic lock for all business hours cabinets, referred to as the Swing Bolt. This lock is not applicable for the Level 1 vaults.



This lock is very similar in operation to the electronic lock currently in use:

- Six (6) digit combination
- One beep after each digit
- Two beeps after successful combination
- Three beeps after wrong combination
- Steps to change the combination are the same

After entering the correct combination, the bolt will retract electrically, it is not necessary to turn the dial.


Use the door latching device to open the door.

NOTE: DO NOT CLOSE THE DOOR WITHOUT KNOWING AND CHECKING THE OPERATION OF THE COMBINATION. THIS STYLE LOCK **WILL AUTO LOCK** IF THE DOOR IS CLOSED/LATCHED. THERE IS NO MAGIC COMBINATION THAT WILL ALLOW ACCESS. THE LOCK WILL REQUIRE DRILLING BY A CERTIFIED LICENSED LOCKSMITH.

Change the lock combination upon receiving your unit. Do not be tempted to leave the default combination installed. Secure the new combination.

Changing the battery is easy, and can be accomplished with the door closed. Grasp the dial firmly and push up about ¼ inch to dislodge the dial; and remove from the standoff mounting bolts. The 9volt battery can now be replaced. After replacement, place the dial on the standoff mounting bolts and move downward to engage.

It is recommended that batteries be changed twice a year, as a minimum.

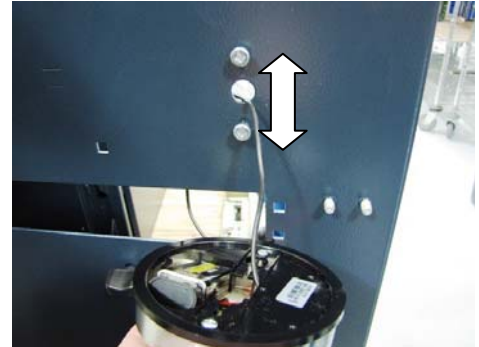

If you have any questions, please contact Technical Support or our Parts Department at 1-901-248-6047 from outside North America or toll free in the U.S./ Canada 1-800-259-6672.