



HCDU HANDLE/BILL TRAY REPLACEMENT

TDN 07103-00265 Rev A. July 30, 2015

Corporate Headquarters

21405 B Street

Long Beach, MS 39560

Phone: (800) 259-6672

Fax: (228) 868-9445

COPYRIGHT NOTICE

© 2015 Triton. All Rights Reserved. TRITON logo is a registered trademark of Triton Systems of Delaware, LLC

Document Updates

July 30, 2015


Original

ECO 1030600

REQUIRED PARTS AND TOOLS

Required Tools	Ratchet with 7/16 inch socket #2 Phillips head screwdriver
Kit 6100-00135	HCDU Handle and Bill Tray Replacement.

Part #	Description	Qty
1	Bill Tray Top, HCDU, BH	1
2	Bill Tray Bottom, HCDU, BH	1
3	Handle, Latch Side, HCDU Forward	1
4	Handle, Hinge Side, HCDU Forward	1
5	Screw/M4x. 7x6// with Star Washer//ROHS	8
6	Screw/ #6-32/ 1/2"//Pan Phil Head w/ Ext Tooth Wash//ROHS	3
7	Cable Clip/ 3/4" Round, Screw-in/Quick Release/ROHS	1
8	Bolt/ 1/4 - 20 x 5/8/ Stainless Steel Carriage/ ROHS	5
9	Part B of Depository Bin Latch/ Switch	1
10	Nut 1/4-20 Kep Nut ROHS	5

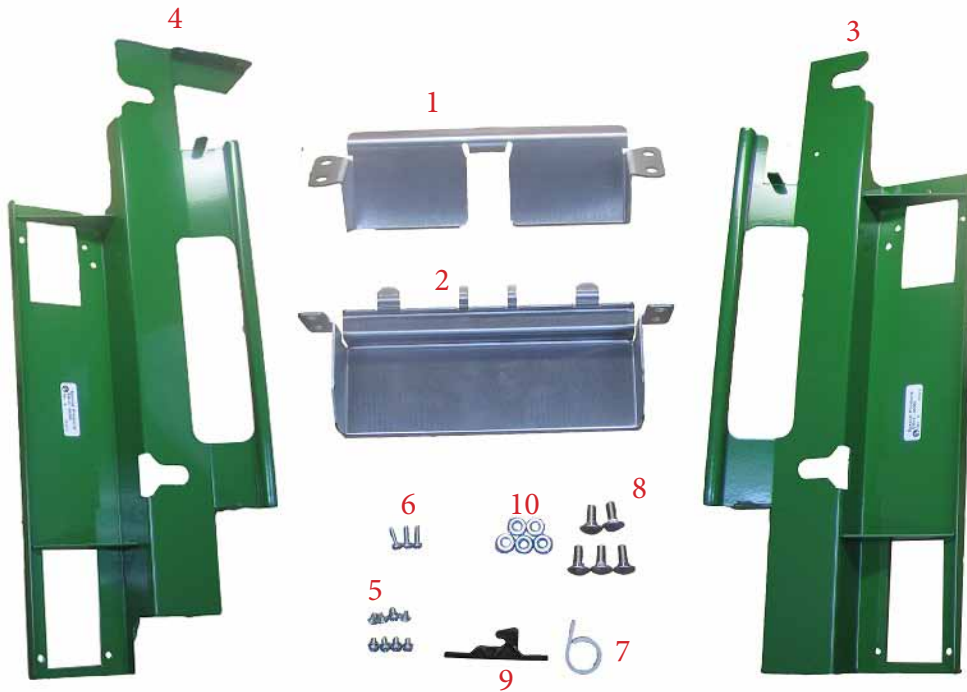


NOTE: Before starting the upgrade, perform proper shut down procedures and disconnect the power to the unit. Refer to Users Manual for procedures on opening the cabinet door.

1. Remove the 5 nuts and carriage bolts holding the top and bottom bill trays in place. Remove the top and bottom bill trays.



2. Disconnect the power cable, data cable, and ground wire from the HCDU. Remove the wires from the cable clip.

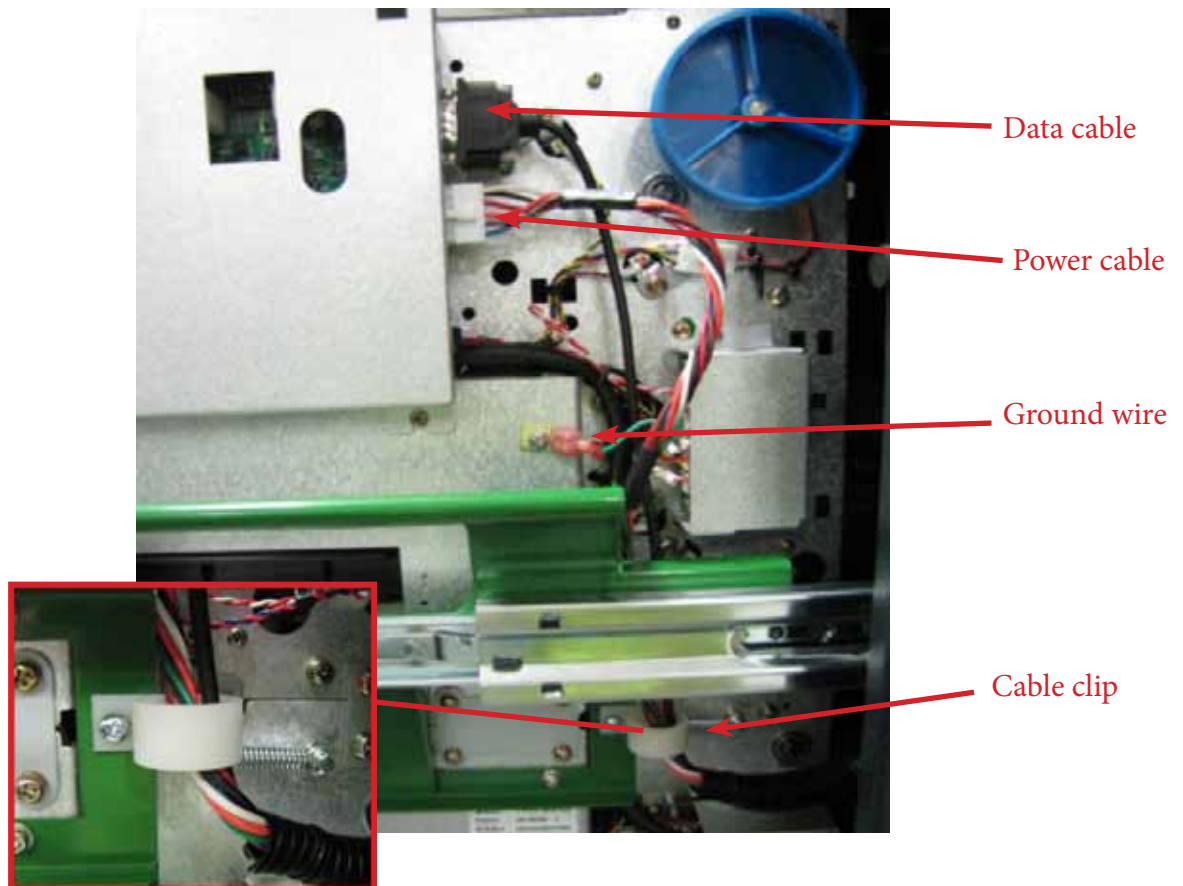

3. Grab the HCDU by the handles and lift it off the rails. Set the HCDU on the floor.



4. Remove the 8 screws (4 on each side) holding the handles in place.



5. Obtain the new top and bottom bill trays. Insert the top and bottom bill trays with the bottom bill tray going in first.


6. Insert the carriage bolts from the front one at a time installing the nuts on the back as you go but do not tighten. Make sure the ground wire is installed in the top right corner as shown. Then tighten the nuts.



7. Obtain the new hinge side handle and part B of the bin latch. Install part B of the bin latch to the hinge side handle with 2 of the #6-32/ 1/2" screws provided in the kit. Make sure the hook is facing up exactly as shown.




8. Install the hinge side handle to the left side of the HCDU with 4 of the M4x. 7x6 screws provided in the kit.

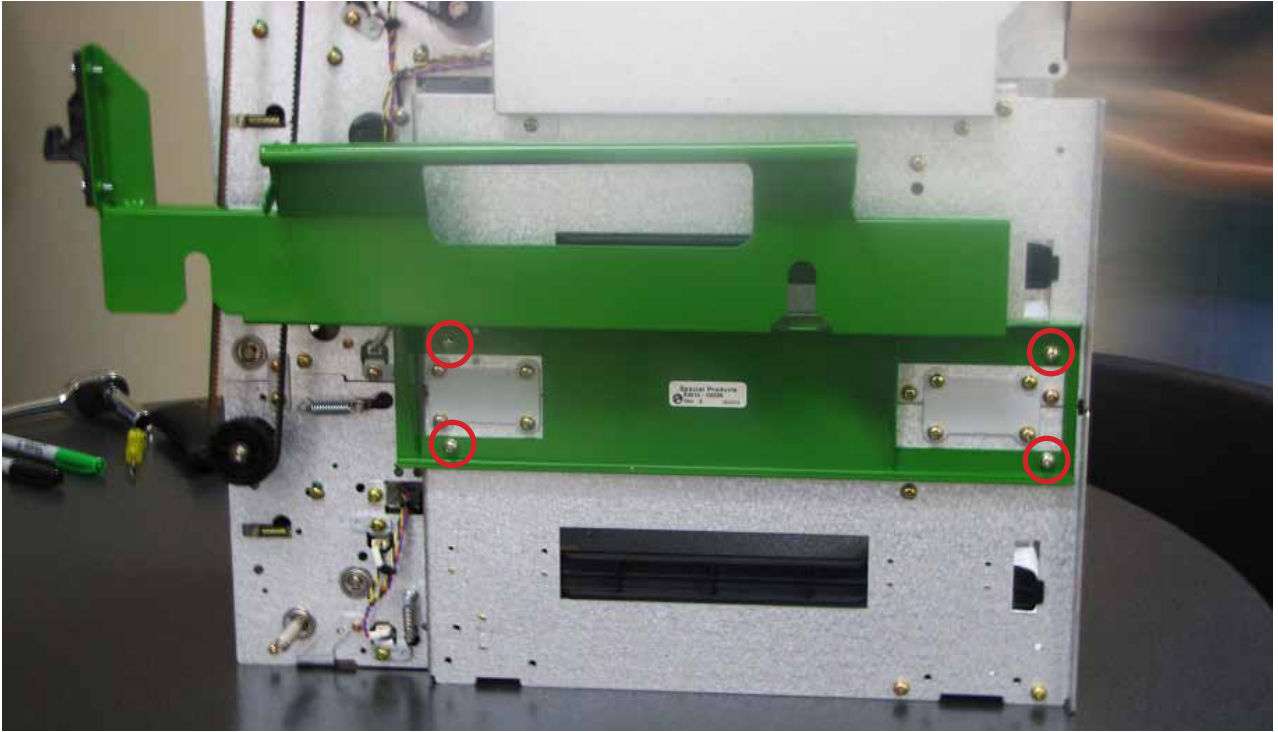

9. Obtain the new latch side handle and the cable clip. Install the cable clip on the latch side handle with the remaining #6-32/ 1/2" screw provided in the kit as shown.




10. Install the latch side handle to the right side of the HCDU with the remaining 4 M4x. 7x6 screws provided in the kit as shown.

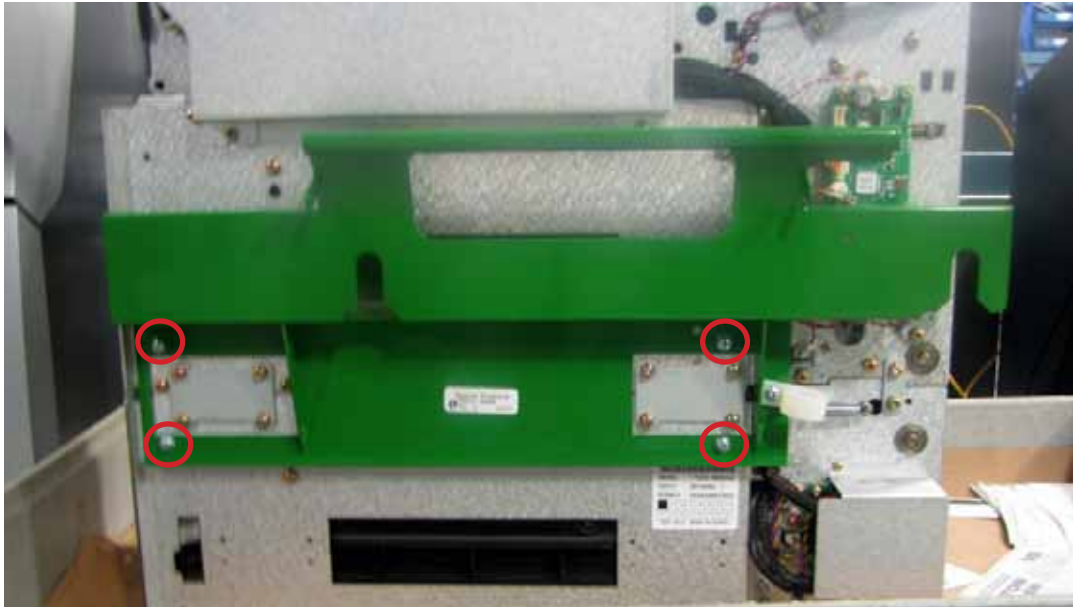

11. Gripping the HCDU by the handles, lift the HCDU. Set the HCDU on the rails with the standouts on the rails fitting into the notches on the handles.



12. Attach the power cable, data cable and ground wire to the HCDU as shown. Make sure that the wires are routed through the cable clip and carefully tucked behind the latch side handle.

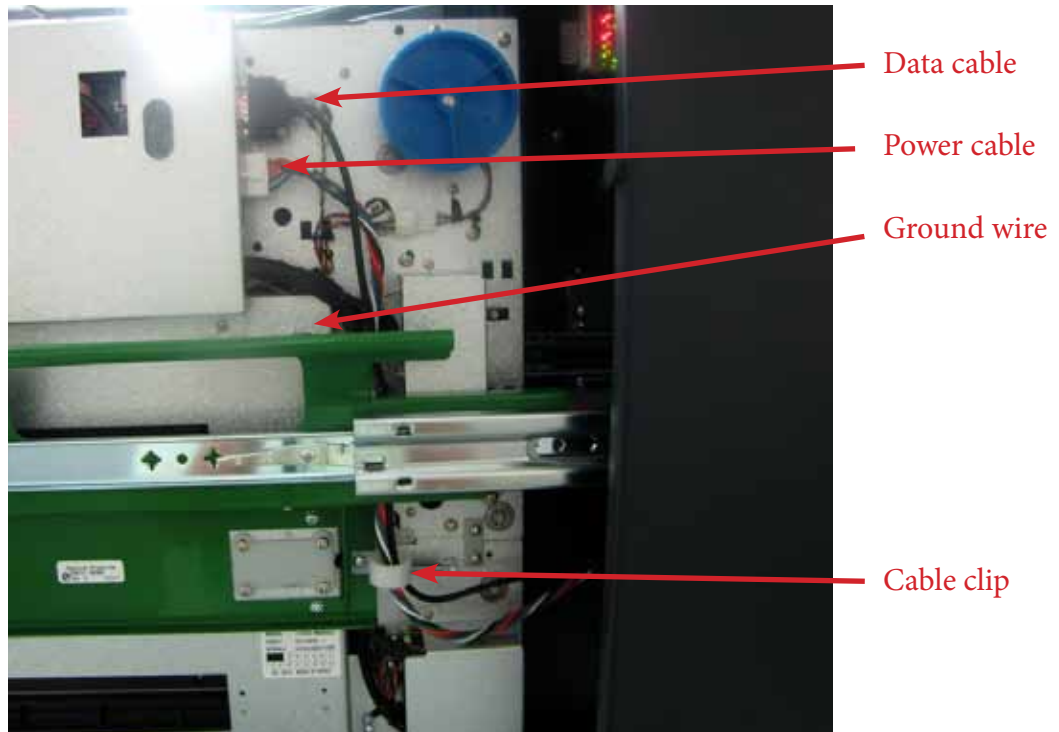

13. Carefully slide the HCDU into the cabinet. Make sure no wires will be caught or damaged.

14. Power up the unit. Run a transaction to ensure the unit is working properly.