



POWER CABLE REPLACEMENT
96XX SINGLE-CASSETTE
DISPENSING MECHANISM

VERSION 1.0

TDN 07102-00034 05/01

CORPORATE HEADQUARTERS:

522 E. Railroad Street
Long Beach, MS 39560
PHONE: (228) 868-1317
FAX: (228) 868-0437

**RMA (RETURN MATERIAL AUTHORIZATION)
RETURN ADDRESS:**

21405 B Street
Long Beach, MS 39560

COPYRIGHT NOTICE

Copyright © 2001 Triton Systems, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form, by any means whatsoever, without the express written permission of Triton Systems, Inc.

POWER CABLE REPLACEMENT - 96XX SINGLE-CASSETTE DISPENSING MECHANISM

PURPOSE

This document gives instructions on replacing the dispensing mechanism power cable.

PARTS SUPPLIED/TOOLS REQUIRED


PARTS SUPPLIED		
1	09120-00026	BACKPLANE TO MECH DC POWER CABLE*
1	09600-00013	BACKPLANE TO MECH DC POWER CABLE*
*The cable supplied will depend upon the type of dispensing mechanism installed in the ATM.		
RECOMMENDED TOOLS		
	MEDIUM PHILLIPS SCREWDRIVER	

REPLACEMENT PROCEDURE


1. Unlock and open the ATM control panel. Turn the power switch (on the power supply panel) to the OFF (0) position. Disconnect the ATM power cord from the connector on the power supply panel.




2. Remove the screws that secure the power supply panel to the side of the card cage and open the power supply panel.

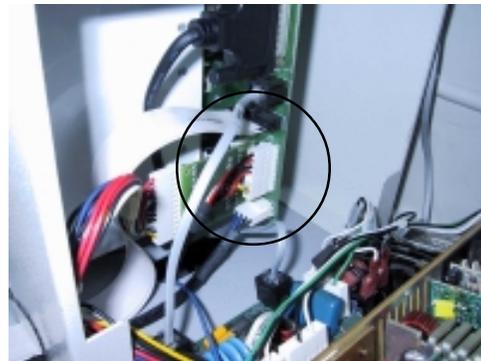

3. Locate the existing mech DC power cable and remove the cable from the backplane connector. Push the cable down through the oval access hole in the bottom of the card cage.

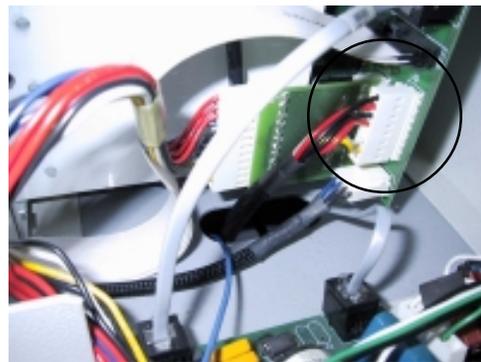

POWER CABLE REPLACEMENT - 96XX SINGLE-CASSETTE DISPENSING MECHANISM

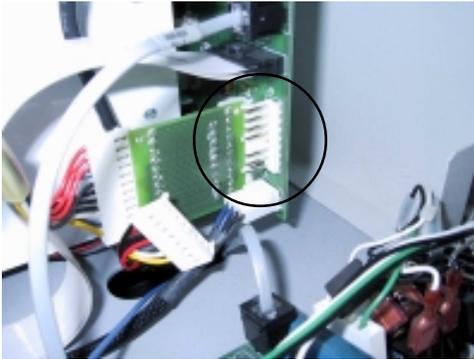


4. Install the new power cable into the backplane connector.
5. Route the other end of the DC power cable down through the oval cutout in the bottom of the card cage and into the cabinet below.
6. Unlock and open the security cabinet. Slide the dispenser mechanism out on the side tray. Locate the existing DC power cable, connected to the rear panel of the dispenser mechanism.



7. Disconnect the existing DC power cable connector from the dispenser mechanism and remove the old cable from the cabinet.

Note: open the cable clips as needed to remove the cable.

8. Route the end of the new DC power cable down through the cutout in the rear of the right slide-rail bracket and let it hang beneath the bracket. Secure the cable by routing it through the existing cable clips.

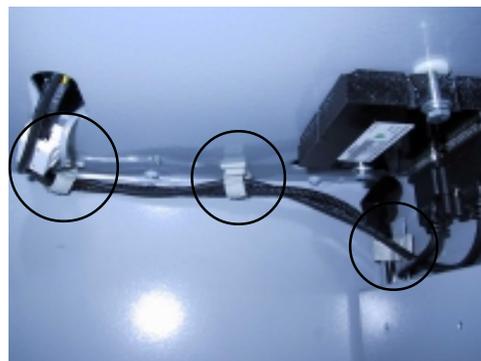

9. After routing the cable, return to the control panel area and close the power supply panel. Tighten the mounting screws securely.
10. Plug the DC power cable into the mating connector located on the back of the dispenser mechanism.



- 11.** Slide the dispenser mechanism back into the cabinet. Close and lock the security cabinet.
- 12.** Plug the ATM power cord into the power supply panel. Turn the ATM power switch to the ON (I) position. Close and lock the control panel.