



## TECHNICAL

## BULLETIN

### TECHNICAL BULLETIN: 13-06

**DATE:** March 7, 2013

**SUBJECT:** Release of Canada Software Version 3.2 and Tranax Leopard 3.0.1 SP1

**AVAILABILITY:** All Authorized Triton Distributors and Third Party Service Providers

This bulletin addresses:		Recommended Implementation is:	
	Documentation Changes	<b>X</b>	<b>Now for all affected units</b>
	Hardware Service Issues		All affected units during next service visit
<b>X</b>	<b>Software Announcements</b>		Optional
	Technical Tips		No implementation required

### DESCRIPTION:

Triton announces the release of **Software Version 3.2 for Canada** for the following Triton ATMs: RL1600, RL2000, RL5000, FT5000, RT2000, and Traverse. In addition, **Service Pack 1 is being released for the Tranax Leopard main board with 3.0.1 software**. Read this bulletin and the release notes carefully before deciding to upgrade your software. Release notes (*XS 3.2.0 Canada Software Release Notes.pdf* and *Leopard Tranax 3.0.1 SP1 Canada Release Notes.pdf*) may be found on the Triton partner website ([www.TritonATM.com](http://www.TritonATM.com)). Check with your processor on certification status before deploying software.

Some major features:

#### EMV Kernel

In order to meet EMVCo requirements and renewal guidelines, this software release contains a new version of the EMV kernel. The version will be listed in Main Menu > Terminal Configuration > More Options > EMV Configuration > Terminal EMV Configuration as **1.0.0.8**. This is a major feature in the 3.2 software and the only feature added with the Tranax Leopard 3.0.1 SP1 software.

#### Management Favorites

A Favorites Menu has been added as the starting point of Management Functions after login. Enabled by default, this menu's settings are unique to each management user. Button **0** will always point to the Main Menu and remain non-configurable. Initial login will display the following screen:



Buttons **1-9** may be configured to the functions that the user desires. The user can only choose functions to which they have authorized access. The Favorites Menu may be reconfigured anytime via the **0** button on the Main Menu.


## Cassette Denomination Security

A security feature has been added to ensure the user has proper access to the vault and the cassette contains currency before allowing the user to change the cash denomination (multiple amount) value. (Main Menu > *Terminal Configuration* > *Cassette Setup* > *Cassette Parameters* > *Multiple Amount*.)

When **7** is selected to change the denomination, the selected cassette is unlocked (for dispensers that support locking) and the user is prompted to remove the cassette:




After removing the cassette and pressing ENTER on the keypad, the user is prompted to replace the cassette:

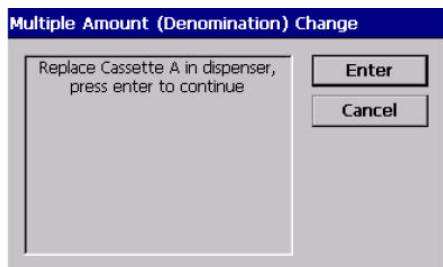

After replacing the cassette and following the normal process of changing the denomination amount, the amount is changed.

If any of these steps fail, the dispenser is not operational, or the user presses cancel to abort the process, the following message is displayed and the denomination change is not allowed:

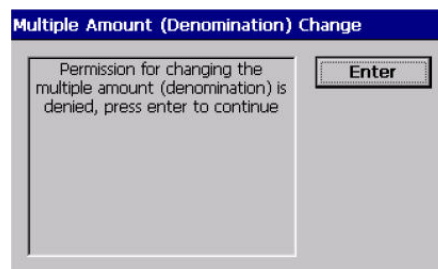

Please review the Release Notes for the many more features found in the 3.2 version. Below is a nutshell bullet list of some of the additional features:

- Show Corrective Actions for Terminal Errors
- Firewall Support (X2 Systems Only)
- File Transfer Interruption Recovery
- Send Range of Journals to Triton Connect
- Download Keys Failure Description
- Download Keys/Day Close SSL Failure
- EPP Serial Number at Triton Connect
- Enable/Disable Journal Upload
- Automatically enable shutter for NMD100
- Single Note Test Dispense
- Modem Communication Time Improvements
- Software Update History
- Terminal ID Verification
- Ping Function
- SSL Certificates
- Receipts Not Printing in Low Memory
- Default Transaction Type
- Screen File Loading
- Schedule Reboot When Out of Service
- Display Customer Name on PIN Entry

**If you have any questions, please contact Technical Support or our Parts Department at 1-228-575-3100 from outside North America or toll free in the U.S./ Canada 1-800-259-6672.**