



VAULT DOOR SENSOR INSTALLATION (MODEL RL5000 X-SCALE)

TDN 07102-00002 05/2005

CORPORATE HEADQUARTERS:

522 E. Railroad Street
Long Beach, MS 39560
Phone: (228) 868-1317
Fax: (228) 868-0437

RMA (RETURN MATERIAL AUTHORIZATION)

RETURN ADDRESS:

21405 Avenue "B"
Long Beach, MS 39560

COPYRIGHT NOTICE

© 2005 Delaware Capital Formation, Inc. All Rights Reserved. TRITON, TRITON WHERE MONEY COMES FROM, TRITON WAVES, DOVER and the DOVER logo are registered trademarks of Delaware Capital Formation, Inc., a wholly-owned subsidiary of Dover Corporation.

DOOR SENSOR INSTALLATION

PURPOSE

This guide covers the steps for installing a door sensor in the Model RL5000 X-Scale ATM. This procedure includes a list of all tools and hardware necessary for the upgrade as well as the steps involved.

Kits are only available for the following cabinet designs:

- **Business Hours units manufactured after serial number LRL5115042991411**
- **Level 1 (Safe) units manufactured after serial number LRL5125042941423**

SCOPE

This procedure applies to all service personnel involved in the process of maintaining or converting Triton ATMs.

BUSINESS HOURS UPGRADE KIT



TOOLS REQUIRED		
Phillips Screwdriver		Diagonal Cutters
DOOR SENSOR UPGRADE KIT (RL5000) BUSINESS HOURS (P/N 06200-06048)		
PARTS SUPPLIED		
PART NUMBER	DESCRIPTION	QUANTITY
09120-00709	Cable, Safety Switch	1
01050-00030	Switch, Plunger Type, Snap-In	1
03011-00772	Bracket, Cabinet Sensor	1
02054-00111	Screw, #8-32, 1/2" Countersunk Phillips Head	2
02072-00002	Clip, Wire Harness	2
02031-00004	Nut, #8-32, Hex Nut w/Ext. Tooth Washer	1
02054-00048	Screw, #8-32, 3/8" Truss Phillips Head	1
03072-00015	Ty Wrap	5
07102-00002	Vault Door Sensor Installation (RL5000)	1
-----	Supported Software	1

LEVEL 1 (SAFE) UPGRADE KIT


TOOLS REQUIRED		
Phillips Screwdriver		Diagonal Cutters
DOOR SENSOR UPGRADE KIT (RL5000) LEVEL 1 - VAULT (P/N 06200-00197)		
PARTS SUPPLIED		
PART NUMBER	DESCRIPTION	QUANTITY
09120-00709	Cable, Safety Switch	1
01050-00030	Switch, Plunger Type, Snap-In	1
03011-00944	Bracket, Cabinet Sensor (Vault)	1
02054-00051	Screw, #8-32, 5/16" Pan Phillips Head w/Cone Washer	2
03072-00015	Ty Wrap	5
07102-00002	Vault Door Sensor Installation (RL5000)	1
-----	Supported Software	1

BUSINESS HOURS CABINET

Docking Board/Printer Presenter Connections/Cable Routing

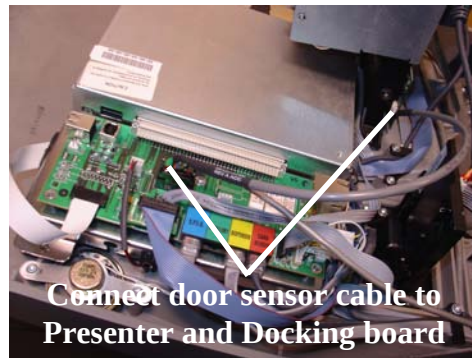
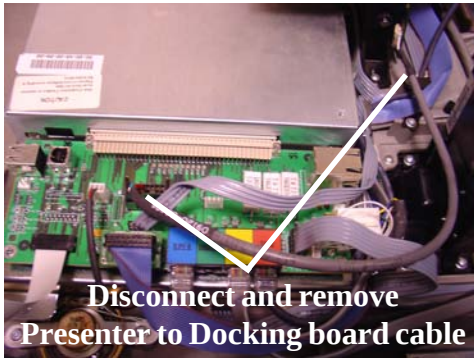


RL5000 BUSINESS HOURS CABINET DOOR SENSOR

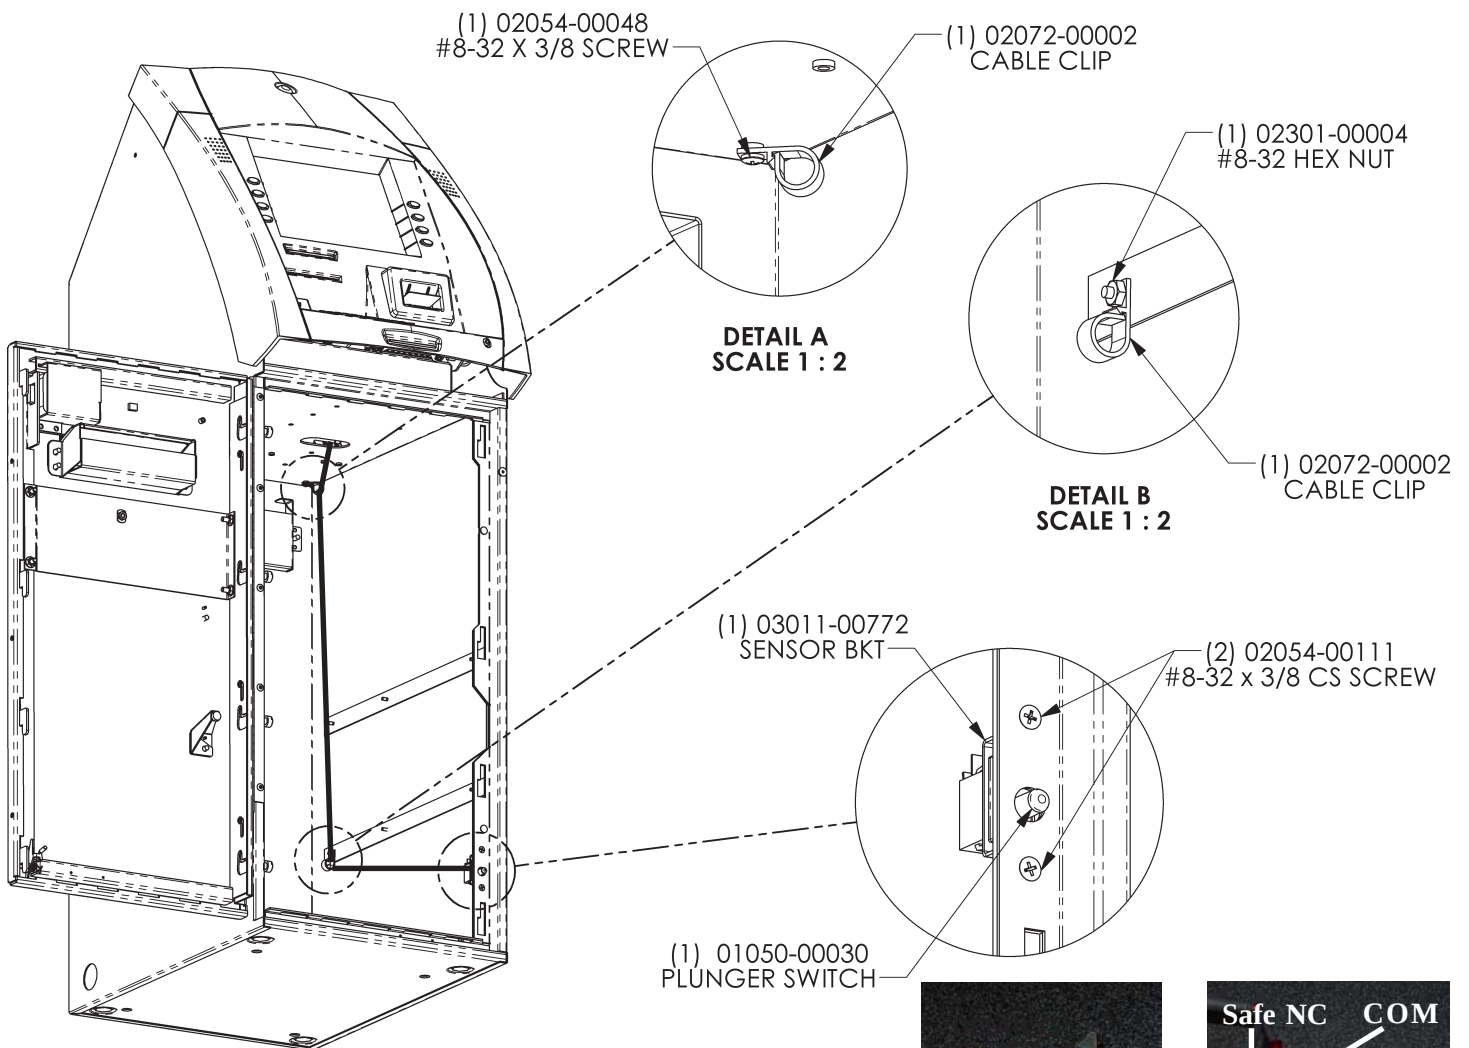


LEVEL 1 (SAFE) CABINET


Docking Board/Printer Presenter Connections/Cable Routing

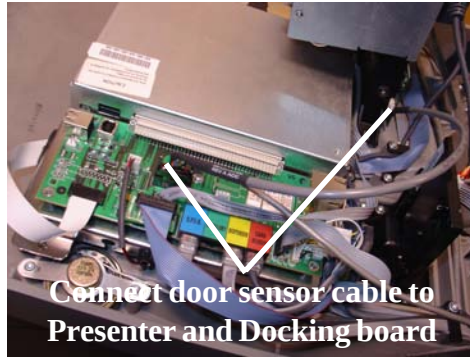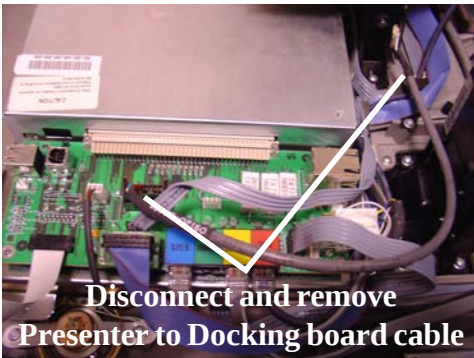

RL5000 LEVEL 1 VAULT DOOR SENSOR

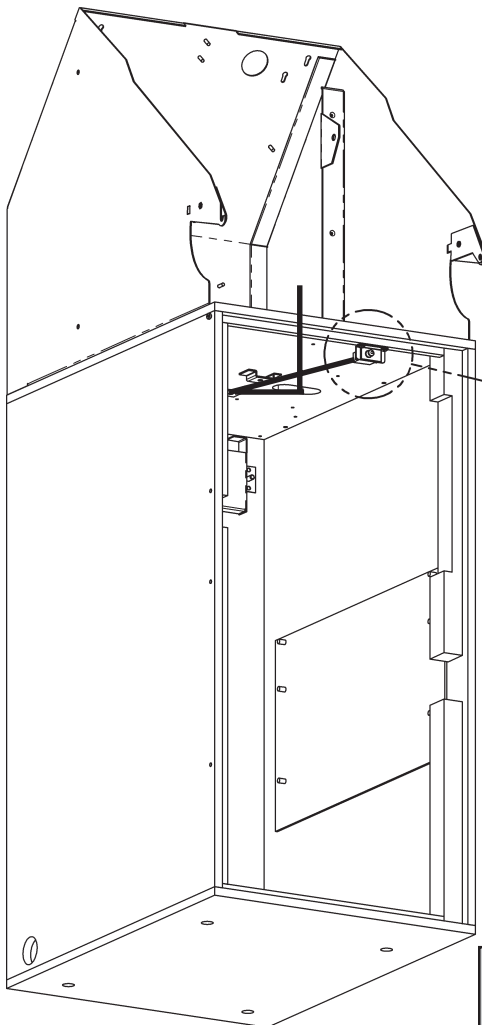

Ty wrap excess cable
length where applicable

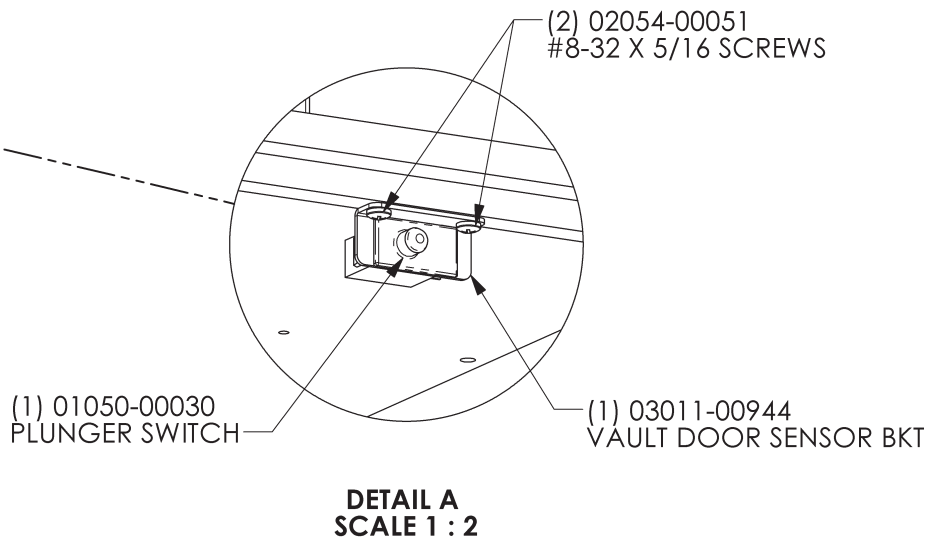

CONNECTIVITY TO DOOR SWITCH

The cable connections for the vault plunger switch are the same as the business hours. See previous page/illustrations for cable connectivity.